



Aero **V**

Product Catalog

This catalog contains all of Cold Jet's Aero V product offerings and all part numbers that were current at the time of catalog production.

Images shown are for representative purposes only.

Products may vary from the images displayed. Cold Jet will always ship the latest version of each part. Invoices will always reflect the latest revision level numbers.

Cold Jet is not liable for typographical errors or changes to specifications presented.

Check www.coldjet.com for the most recent version of this document.

Contact your Cold Jet representative for the most current information.

General Contact Information

USA Headquarters: +1.513.831.3211 +1.800.337.9423

Latin America: +52 (81) 10 97 0445

Germany: +49 (0) 6551 9606.0

Europe Headquarters: +32 (0) 13.53.95.47

Middle East: +32 (0) 13.53.95.47

Canada: +1.800.337.9423 x501

Australia: +61 2 9600 9570

Customer Support After-Hours HOTLINE:

United States/Canada: +1.800.777.9101

Europe: +32 (0) 13 53 94 47

All other locations: +1.513.576.8981

Email:

United States & all other locations:
service@coldjet.com

Europe: service.eu@coldjet.com

Aero V SPECIFICATIONS

Hopper capacity 30 lbs (13.6 kg) capacity

Variable feed rate 0 - 3 lbs (0 - 1.4 kg) per min

Blast pressure range

with optional pressure regulator 20 to 140 psi (1.4 to 9.7 bar)

without pressure regulator 65 to 140 psi (4.5 to 9.7 bar)

Supply pressure range

Aero V 65 to 140 psi (4.5 to 9.7 bar)

Air consumption range 50 to 215 cfm (1.4 to 6.1 m³/min) at 80 psi (5.5 bar)

Weight..... 165 lbs (75 kg)

Size (L x W x H)..... 28" x 17" x 32" (71 cm x 43 cm x 82 cm)

12-month warranty (extended warranty packages available)

Aero V

Aero V Dry Ice Blast Cleaning System

The Aero V Dry Ice Blast Cleaning System comes complete with one length of 1" (2.5 cm) blast hose, one length of air hose, single speed applicator, 323S1 nozzle with handle (unless otherwise specified), static bond cable, hose wrap, and hose carrier.

Part #: Aero V 2A0179



Applicators



High Performance Applicator

Lightweight, single-finger trigger allows easy control of blasting power. Safety switch. Designed for right and left handed users. Includes a JIC fitting mounted to a rotary union for superior ergonomics. Integrated Quick Change feature so that nozzles can be changed safely and easily.

Single-Speed - Part #: 2E0362-G1 (1") Standard on Aero 30 V



Tight Access Applicator

Lightweight, simple & easy angled design for better control of blasting in areas where the access is tight. Safety on/off switch to ensure safety when not blasting.

Part #: 2E0447 (includes QCM)



Remote Switch

Remote start/stop station for fixed applications. Connects directly to blast control cable.

Part #: 2G1137



Mini Applicator

Small and lightweight design for ease of use and great control of blasting for applications where a smaller applicator is desired. Safety on/off switch to ensure safety when not blasting.

Part #: 2E0524-C (includes QCM)



Foot Switch

Eliminates the need for a hand-held control switch. Allows nozzle to be attached directly to the blast hose for better ergonomics. "Deadman style" safety foot pedal.

Part #: 2G1070

Hoses and Cables

Blast Hose*

20' (6.1 m) section

Designed to eliminate constrictions and freezing up during blasting.

Hose Part #:

- 2N0221-G1 - 3/4" (1.9 cm) ID
- 2N0221-G2 - 3/4" (1.9 cm) ID (with Control Cable)
- 2N0222-G1 - 1" (2.5 cm) ID
- 2N0222-G2 - 1" (2.5 cm) ID (with Control Cable)
- 2N0223-G1 - 1 1/4" (3.2 cm) ID
- 2N0223-G2 - 1 1/4" (3.2 cm) ID (with Control Cable)

Urethane Blast Hose - 140 psi (9.7 bar)

- 5N0043 - 3/4" (1.9 cm) ID
- 2N0205-G1 - 3/4" (1.9 cm) ID (with Control Cable)
- 5N0042 - 1" (2.5 cm) ID
- 2N0200-G1 - 1" (2.5 cm) ID (with Control Cable)
- 5N0044 - 1 1/4" (3.2 cm) ID
- 2N0203-G1 - 1 1/4" (3.2 cm) ID (with Control Cable)



5-Pin Control Cable

10' (3.04 m) and 20' (6.1 m) Section.

Use to connect remote, foot switch or Dual Trigger Interconnect Box to blast unit.

Part #: 3G0072 (10' - 3.04 m)
4G0819 (20' - 6.1 m)

Air Hose

25' (7.6 m) Section 1" (2.5 cm) ID 300 psi (20.7 bar)

Used to carry pressurized air from air source to blast unit. Includes one swivel adapter.

For each length of hose ordered, order one Whip Check!
Part #: 2N0199

Bond Cable Shaft Collar

Part #:

- 3N0087 - 1 1/4" bore (for 3/4" hose)
- 3N0088 - 1 1/2" bore (for 1" hose)
- 3N0089 - 1 13/16" bore (for 1 1/4" hose)

* One corresponding bond cable shaft collar is required per complete hose run (not one per hose section).


Aero Nozzles

Cold Jet's nozzles are designed to maximize performance whatever the application. Broad or precise cleaning, hard to reach areas or working in a confined space, our line of nozzles will exceed your expectations.

Recommended operating parameters are shown in the tables for each nozzle.

Low and Standard Flow Nozzles


These straight nozzles have standard air consumption rate of 100 cfm or less at 80 psi.

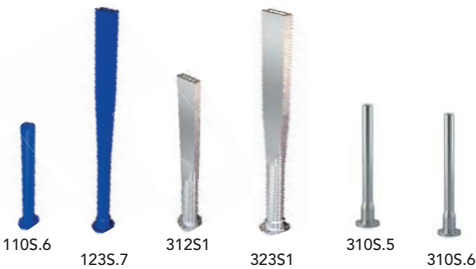

Nozzle	Part #	Air Consumption	Blast Swath	Feed rate	Length	Material	Handle
110S.6	5E0180	50cfm @ 80psi (1.4m ³ /min @ 5.5 bar)	0.6" (1.5 cm)	1-3 lbs/min (0.5-1.4 kg/min)	10" (25.4 cm)	Anodized Aluminum	2E0209
123S.7	5E0179	50cfm @ 80psi (1.4m ³ /min @ 5.5 bar)	0.7" (1.8 cm)	1-3 lbs/min (0.5-1.4 kg/min)	23" (58.4 cm)	Anodized Aluminum	2E0209
310S.5	5E0233	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	0.45" (1.1 cm)	2-4 lbs/min (0.9-1.8 kg/min)	10" (25.4 cm)	Aluminum	2E0275
310S.6	5E0232	140cfm @ 80psi (3.9m ³ /min @ 5.5 bar)	0.6" (1.5 cm)	2-4 lbs/min (0.9-1.8 kg/min)	10" (25.4 cm)	Aluminum	2E0275
312S1	5E0156	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	1" (2.5 cm)	2-4 lbs/min (0.9-1.8 kg/min)	12" (30.5 cm)	Aluminum	2E0289
323S1	5E0175	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	1" (2.5 cm)	2-4 lbs/min (0.9-1.8 kg/min)	23" (58.4 cm)	Aluminum	2E0209

High Flow Nozzles

These straight nozzles have air consumption rate of more than 100 cfm at 80 psi.

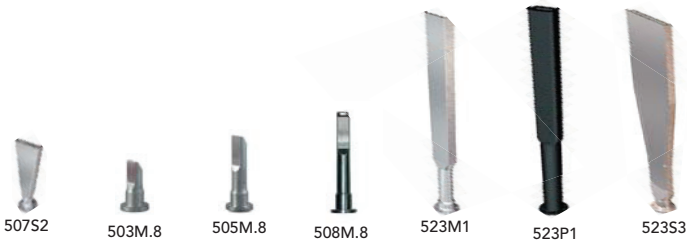

Nozzle	Part #	Air Consumption	Blast Swath	Feed rate	Length	Material	Handle
507S2	5E0141	165cfm @ 80psi (4.7m ³ /min @ 5.5 bar)	2" (5.1 cm)	3-5 lbs/min (1.4-2.3 kg/min)	7" (17.8 cm)	Aluminum	n/a
503M.8 (MERN Technology)	5E0095	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	0.6" (1.5 cm)	3-5 lbs/min (1.4-2.3 kg/min)	3" (7.6 cm)	Aluminum	n/a
505M.8 (MERN Technology)	5E0108	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	0.6" (1.5 cm)	3-5 lbs/min (1.4-2.3 kg/min)	5" (12.7 cm)	Aluminum	2E0209
508M.8 (MERN Technology)	5E0107	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	0.6" (1.5 cm)	3-5 lbs/min (1.4-2.3 kg/min)	8" (20.3 cm)	Aluminum	2E0209
523M1 (MERN Technology)	5E0138	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	1" (2.5 cm)	3-5 lbs/min (1.4-2.3 kg/min)	23" (58.4 cm)	Aluminum	2E0209
523P1	5E0167	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	1" (2.5 cm)	3-5 lbs/min (1.4-2.3 kg/min)	23" (58.4 cm)	Polymer	2E0289
523S3	5E0190	165cfm @ 80psi (4.7m ³ /min @ 5.5 bar)	3" (7.6 cm)	4-6 lbs/min (1.8-2.7 kg/min)	23" (58.4 cm)	Aluminum	2E0287

Aero Nozzles (cont.)

Variable Fragmenting MERN Nozzles

With patented MERN technology and new variable fragmenting technology you have the power to control aggression downstream of the nozzle throat for a full range of performance with maximum effectiveness - the most ever from a single nozzle.



Nozzle	Part #	Air Consumption	Blast Swath	Feed rate	Length	Material	Handle
312V2	5E0274	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	1.8" (4.6 cm)	2-4 lbs/min (0.9-1.8 kg/min)	12" (30.5 cm)	Aluminum	2E0289
323V2	5E0252	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	2" (5.1 cm)	2-4 lbs/min (0.9-1.8 kg/min)	23" (58.4 cm)	Aluminum	2E0289
508V.8	5E0272	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	0.6" (1.5 cm)	3-5 lbs/min (1.4-2.3 kg/min)	8" (20.3 cm)	Aluminum	2E0289
523V2	5E0238	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	2" (5.1 cm)	3-5 lbs/min (1.4-2.3 kg/min)	23" (58.4 cm)	Aluminum	2E0289
523V4	5E0257	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	4" (10.2 cm)	3-5 lbs/min (1.4-2.3 kg/min)	23" (58.4 cm)	Aluminum	2E0287

Specialty Nozzles

These nozzles have various configurations for special applications and operate with air consumption rates as noted.



Nozzle	Part #	Air Consumption	Blast Swath	Swath Orientation	Feed rate	Length	Angle	Material
112HK	2E0361	70cfm @ 80psi (2.0m ³ /min @ 5.5 bar)	0.25" (0.6 cm)	n/a	1-3 lbs/min (0.5-1.4 kg/min)	12" x 2" (30.5 x 5.1 cm)	160°	Polymer Coated SST
114P.5	5E0183	70cfm @ 80psi (2.0m ³ /min @ 5.5 bar)	0.25" (0.6 cm)	n/a	1-3 lbs/min (0.5-1.4 kg/min)	10.3" (26.2 cm)	straight	Polymer
307A135V.8	2E0328	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	0.75" (1.9 cm)	Vertical	2-4 lbs/min (0.9-1.8 kg/min)	7.3" X 6.3" (18.6 x 16 cm)	135°	Polymer Coated SST
307A45H1	2E0349	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	1" (2.5 cm)	Horizontal	2-4 lbs/min (0.9-1.8 kg/min)	7.3" x 5" (18.5 x 12.7 cm)	45°	
307A90H.8	2E0326	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	0.75" (1.9 cm)	Horizontal	2-4 lbs/min (0.9-1.8 kg/min)	7" x 5.3" (17.8 x 13.5 cm)	90°	
307A90V1	2E0329	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	1" (2.5 cm)	Vertical	2-4 lbs/min (0.9-1.8 kg/min)	7.3" x 7" (18.6 x 17.8 cm)	90°	
308A45H.8	2E0324	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	0.75" (1.9 cm)	Horizontal	2-4 lbs/min (0.9-1.8 kg/min)	7.7" x 3.5" (19.6 x 8.9 cm)	45°	
308A45V.8	2E0325	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	0.75" (1.9 cm)	Vertical	2-4 lbs/min (0.9-1.8 kg/min)	7.8" x 3.5" (19.8 x 8.9 cm)	45°	
309A45H.8	5E0094	120cfm @ 80psi (3.4m ³ /min @ 5.5 bar)	0.75" (1.9 cm)	Horizontal	3-5 lbs/min (1.4-2.3 kg/min)	8.9" x 4" (22.6 x 10.2 cm)	45°	Aluminum
317A90H1	2E0327	100cfm @ 80psi (2.8m ³ /min @ 5.5 bar)	1" (2.5 cm)	Horizontal	2-4 lbs/min (0.9-1.8 kg/min)	16.6" x 3.4" (42.2 x 8.6 cm)	90°	Polymer Coated SST
509C	2E0411	150cfm @ 80psi (4.3m ³ /min @ 5.5 bar)	n/a	n/a	3-5 lbs/min (1.4-2.3 kg/min)	9" (22.9 cm)	22° cone	Multi

Nozzle Extension Tubes

Extension tubes are used to extend nozzles when additional reach is needed with minimal pressure loss.
Extension tubes connect to nozzle and applicator with proper fittings (not included).



3/4" (1.9 cm) OD
Internal threaded end fittings.
Available in 10" (25.4 cm), 20" (50.8 cm), and 30" (76.2 cm)
Recommended for use with nozzles that have a flow rating
<100 cfm @ 80 psi (2.8 m³/min @ 5.5 bar)
Stainless Steel

Part #: 3E0715 - Length



1" (2.5 cm) OD
Internal threaded end fittings
Available in 10" (25.4 cm), 20" (50.8 cm), and 30" (76.2 cm)
Recommended for use with nozzles that have a flow rating
>100 cfm @ 80 psi (2.8 m³/min @ 5.5 bar)
Aluminum

Part #: 3E0633 - Length

Nozzle Accessories



JICF Quick Change Module

Enables quick and safe nozzle changes
Can be used with all nozzles, with appropriate couplings and end fittings

Part #: 2E0360 - 3/4" (1.9 cm)



Nozzle Base

1" (2.5 cm) JICM
Allows the 1" (2.5 cm) OD nozzle extension tube to be used with nozzle
Aluminum

Part #: 2E0420



Nozzle Adapter

3/4" (1.9 cm) JICM
Used with 3/4" (1.9 cm) JICF nozzles and extension tubes when used with AeroTech Applicator or QCM.
Aluminum

Part #: 3E0729



1" (2.5 cm) JICM
Allows connection of extension tube to applicator
Aluminum

Part #: 3E0976



Nozzle Handles

Attaches to nozzles in order to increase nozzle control when blasting.

Adjustable Tube Handle

Part #: 2E0275 - 3/4" (1.9 cm) OD
2E0209 - 1" (2.5 cm) OD
2E0289 - 1 3/16" (3 cm) OD



Clamp Style (used with 523S3 and 523V4)

Part #: 2E0287

Accessories



Extension Cord & Reel

50' (15.2 m) of electrical power cord used when additional length of cord is necessary.
Part #: 2H0017-G1 (110 Volts)
(Contact Customer Service for other voltage options)



JIC Fittings

Used to connect the hose to the blast machine.
Used to connect extensions to some nozzles.

Part #: 12HTX-S - 3/4" (1.9 cm) JICM
16HTX-S - 1" (2.5 cm) JICM
20HTX-S - 1 1/4" (3.2 cm) JICM
16-12TRBTX-S - 1" (2.5 cm) JICF to 3/4" (1.9 cm) JICM
5N0013 - 1" (2.5 cm) JICM to 3/4" (1.9 cm) JICM Aerodynamic
5N0004 - 1 1/4" (3.2 cm) JICF to 1" (2.5 cm) JICM Aerodynamic
5N0003 - 1 1/4" (3.2 cm) JICM to 1" (2.5 cm) JICM Aerodynamic
5N0022 - 1 1/2" (3.8 cm) JICM to 1 1/4" (3.2 cm) JICM Aerodynamic

Accessories (cont.)



Externally Mounted Air Pressure Regulator

Control your blast aggression with an externally mounted pressure regulator
Removable at the blast machine.

Part #: 2M0022-G1



Externally Mounted Coalescing Air Filter (CAF)

Designed to remove large amounts of water, oil, rust, and/or other particles from the air supply.

Part #: 2M0022-G7



Static Bond Cable


Connects the hose to the work piece being blasted bonding the two in order to virtually eliminate electrostatic discharge.

Part #: 2G1282

After Cooler

Recommended when clean dry air cannot be guaranteed for blasting.

Part #: 2M0023-G1



Hose Management System



Hose Wrap

Velcro wrap used to assist in control and storage of your hoses.

Part #: 4Z0597



Hose Carrier

Durable rubber handle with fabric straps to help hang and carry hoses when moving or storing.

Part #: 4Z0590

Flow Divider*



Splits one blast flow into two for simultaneous blasting while maintaining pellet integrity

Part #: 2E0320 - 1 1/4" (3.2 cm) flow to two 1" (2.5 cm) hoses

2E0319 - 1 1/2" (3.8 cm) flow to two 1 1/4" (3.2 cm) hoses

Dual Trigger Interconnect Box is required Part #: 2G1157

**The Air Only Applicator Switch will not function if Flow Divider is being used.*

Safety Accessories



Fire Sleeve

Recommended if blast hose might be exposed to temperatures above 180° F (82.26° C)
Allow 4' (1.2 m) to 20' (6.1 m) coverage for area of blast hose subject to high heat

Part #: 4N0094 - 3/4" (1.9 cm)
4N0152 - 1" (2.5 cm)
4N0153 - 1 1/4" (3.2 cm)

Safety Kit

Recommended Safety Kit for use with dry ice blasting equipment.
Meets OSHA requirements for operator noise protection (with the use of properly rated and worn ear plugs)

Kit includes the following:

- 100 sets of ear plugs
- 2 ear protectors
- Eye protector shield
- Gloves
- Dry ice scoop



Part #: 2Z0001

Global Headquarters

Loveland, OH USA
+1 800.337.9423

European Headquarters

Zolder, Belgium
+32 (0)13 53 95 47

Germany

Weinsheim, Germany
+49 (0)6551 96060

Canada

Ontario, Canada
+1 800.337.9423 x501

Latin America

Monterrey, NL Mexico
+52 (81)1097.0445

Middle East

Zolder, Belgium
+32 (0)13 53 95 47

Australia

Sydney, Australia
+61 2 9600 9570



Cold Jet®
www.coldjet.com